


HIGH PERFORMANCE RENDER SYSTEM - SILICONE FINISHES

A modern, high technology render system, formulated for application to traditional masonry substrates and developed using polymer modified technology. Silicone finishes offer a modern render system in a wide variety of colours in addition to being highly flexible and crack resistant.

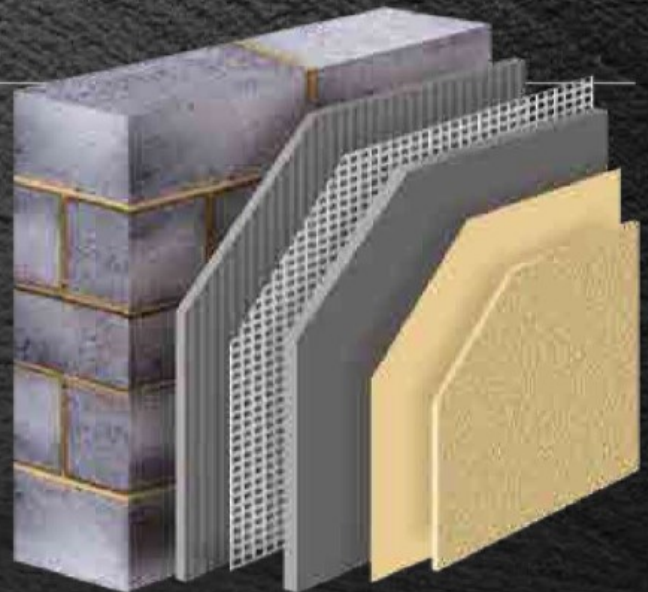


SYSTEM PRODUCT DETAIL


Key Coat/Primer	Dependent on substrate condition, porosity and type
Basecoat	Stormshield High Performance Basecoat
Reinforcement	Stormshield Render Reinforcing Mesh Cloth
Primer	Stormshield Silicone Enhanced or Full Silicone Primer
Render Finish	Stormshield Silicone Enhanced or Full Silicone Render

Features

- High Performance, polymer modified render system
- Can be applied to suitably prepared masonry surfaces
- Vapour permeable/breathable
- High levels of crack resistance
- Simple application and easy to maintain
- Suitable for new build and refurbishment work
- BBA Approved




Apply Stormshield High performance Basecoat to suitably prepared masonry substrates



Bed reinforcing Stormshield Mesh Cloth into Basecoat



Apply second pass of Basecoat to enclose Stormshield Mesh Cloth and to a total thickness of 10mm and work to a plain faced finish



Apply 1 coat of Stormshield Silicone Enhanced or Full Silicone Primer to fully cured Basecoat and allow to dry



Apply Stormshield Silicone Enhanced or Full Silicone Render in the aggregate size chosen and finish with a plastic float

FINISHES



STORMSHIELD

Silicone Enhanced Render

- Available in 1.0mm or 1.5mm



STORMSHIELD

Full Silicone Render

- Available in 1.0mm or 1.5mm

Both finish options are available in 200 specially selected standard colours and other additional special shades on client request. Please see colour chart for additional information.